

मंडल कार्यालय/Divisional Office,
परिचालन शाखा/ Transportation Branch,
तिरुवनंतपुरम/ Thiruvananthapuram
दिनांक/Date: 07/03/2025.

No.V/T 20/HVPI/IPN/2025/1

NOTICE

Sub:- Supply, installation, testing and commissioning of high visibility point indicator at Irumpanam yard.

Sealed quotations are invited by the under signed from the qualified Engineering firm/Suppliers for the work of Supply, installation, testing and commissioning of high visibility point indicator at Irumpanam yard for non-interlocked Points No. 155, 184, 185, 161, 163, 165, 166, 167, 168 as per schedule/specification of the work.

WORK TO BE DONE

Supply, installation, testing and commissioning of high visibility point indicator at Irumpanam yard for non-interlocked Points No. 155, 184, 185, 161, 163, 165, 166, 167, 168 as per schedule/specification as shown below.

S l n o	Item	Specification/Material	Quantity in numbers
1	High visibility point indicator	Fabricated with SS 304 rack and pinion and connected round shaft, fitted with ball bearing, MS Round Tube with 3mm thick, florescent 3M yellow reflector type Point Indicator, base with Protection cover of GI sheet painted with metallic aluminum fluorescent paint, On-Site Installation of point indicator with fasteners and accessories as per drawing attached.	09

Please submit your quotations with a covering letter in your letter head, and shall be reach in this office (Senior Divisional Operations Manager, Southern Railway, Thiruvananthapuram, Pin-695014) on or before **14.00hrs of 17/03/2025**.

Please note that rate must be quoted only in the prescribed format as shown in the Proforma enclosed here with. Detailed specification and split up of price of each item shall be attached as Annexure.


Sr.DOM/TVC

Note:

Publicity shall be given through Railways' also



PROFORMA

Quotation for the work of supply, installation, testing and commissioning of high visibility point indicator at Irumpanam yard non-interlocked Points No. 155, 184, 185, 161, 163, 165, 166, 167, 168 as per the specification of the work.

1	Party's Name(Block letters)	
2	Permanent Address (Proof of address enclosed)	
3	Present Address: (Address of firm)	
4	Phone No:	
5	Details of License/ID card	

Please note that the rate must be quoted as shown below

Schedule of work	Required quantity
Supply, installation, testing and commissioning of high visibility point indicator at Irumpanam yard non-interlocked Points No. 155, 184, 185, 161, 163, 165, 166, 167, 168 as per schedule/specification of the work.	09 Numbers
Total amount	Rs.
(Amount in words) including applicable GST or 18%	

I am aware that I am liable for legal action by Railway Administration if I withdraw from my offer causing revenue loss to Railway.

Place:
Date:

Yours faithfully

IRUMPANAM
('B'-STD-NI)


IRUMPANAM
('B'-STD-NI)
TO SUIT 25 KV AC RE

IPN-ERS	SINGLE LINE HANDLE TYPE TOKENLESS INSTRUMENT.
---------	---

NOTE:
1. BLOCK WORKING: —

IPN-ERS	SINGLE LINE HANDLE TYPE	TOKENLESS INSTRUMENT.
---------	-------------------------	-----------------------

REF.: - SIGNALLING PLAN No. U.2581/1/ALT-5

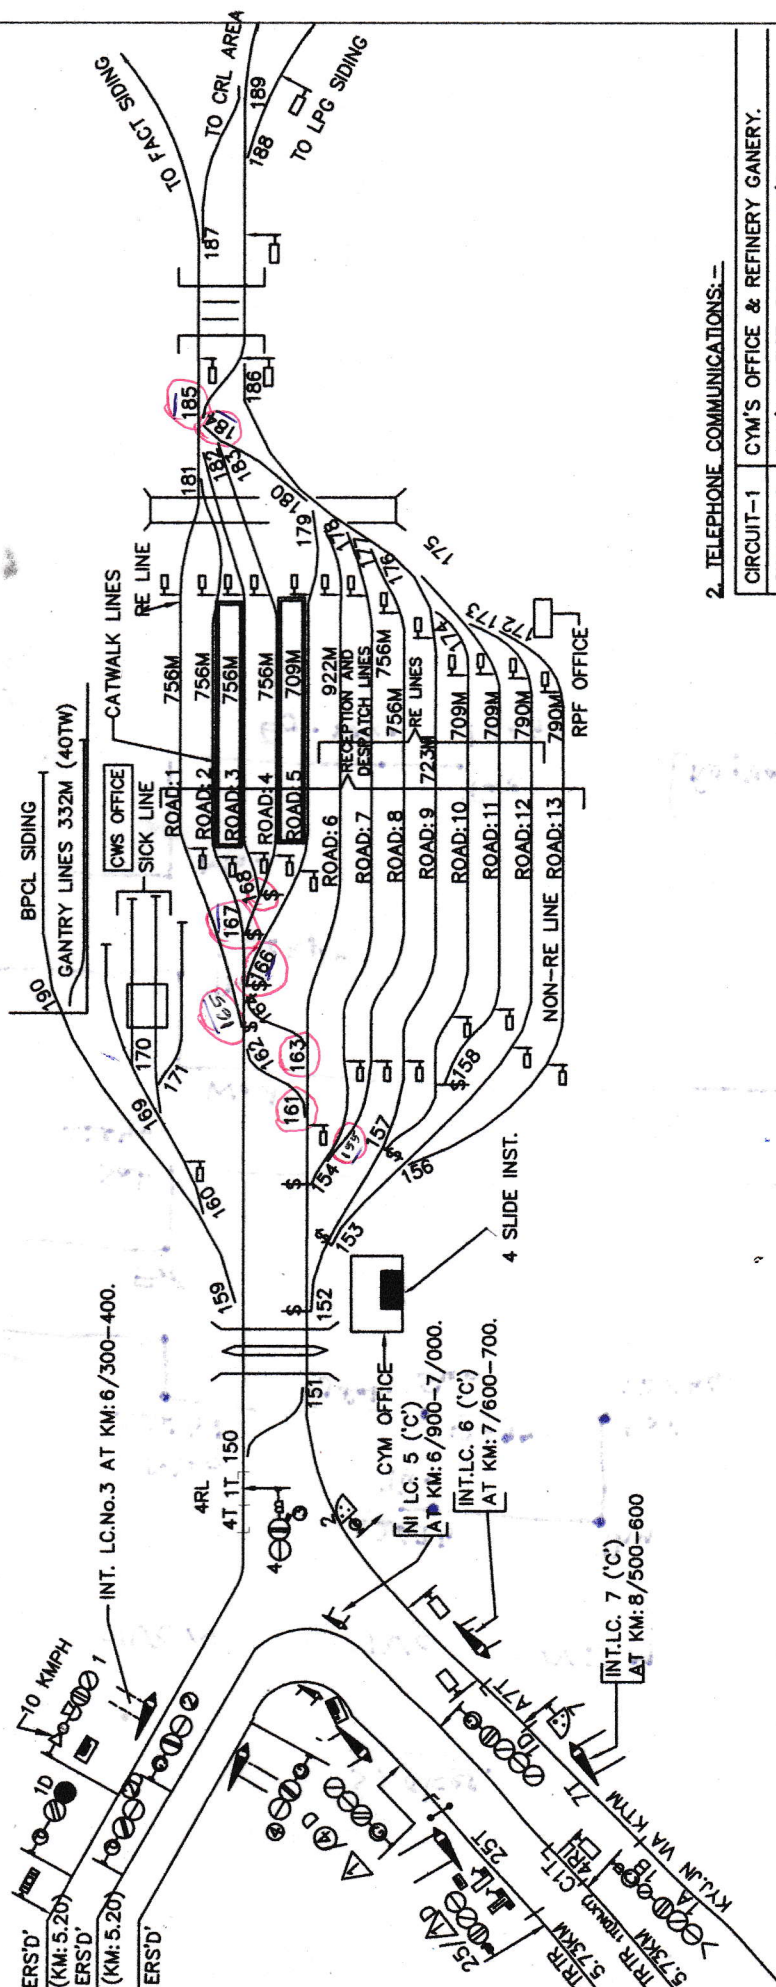

2. TELEPHONE COMMUNICATIONS: --

CIRCUIT-1	CYM'S OFFICE & REFINERY GANERY.
CIRCUIT-2	CYM'S OFFICE, POINTS MAN'S BUNK AT ERS END AND TXR'S OFFICE.
CIRCUIT-3	CYM'S OFFICE, & FACT OFFICE.
CIRCUIT-4	CYM'S OFFICE & TRTR STATION.
CIRCUIT-5	CYM'S OFFICE & LC.No.3 AT KM: 6/300-400.

5

4

3

2




1

A

B

C

D

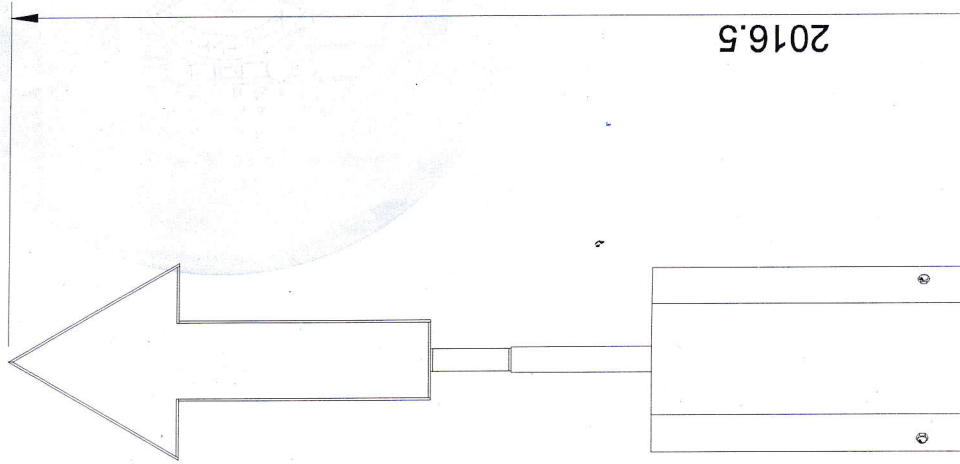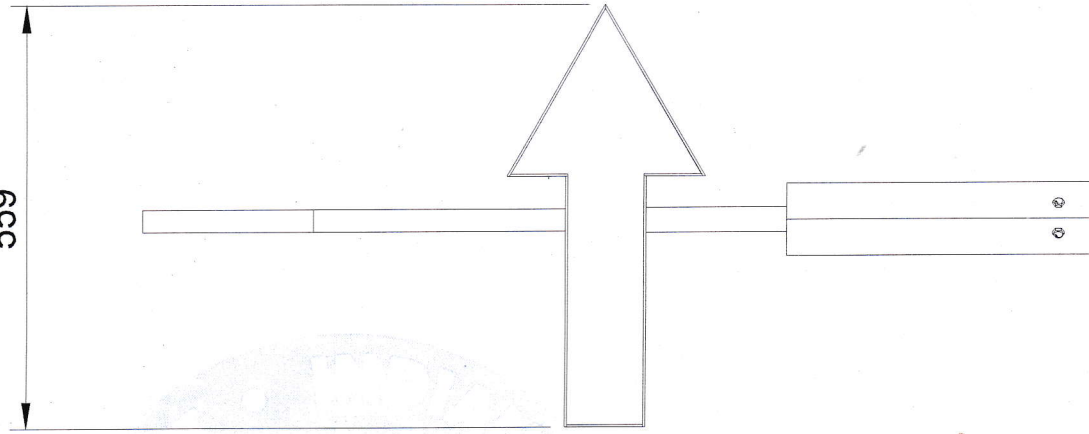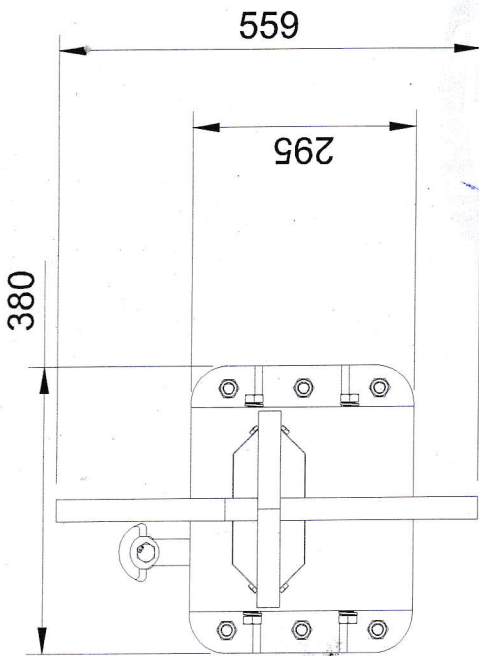

5

4

3

2

1

A

B

C

D

